



ACCENDO
LIGHTING



General Description:

The Retrofit Kit Cover LED (ALRCK LED) is used to convert fluorescent tube T8 industrial strip fixtures to LED which results in substantial energy savings and improved lighting. The Retrofit Cover Kit can easily produce ideal IES recommended light levels with minimal energy consumption. Accendo retrofit kits will continue to provide consistent fixture performance and repeat annual energy savings for many years to come.



FEATURES

- Proudly designed and manufactured in Houston, Texas. Considerable reduction in energy costs as compared to open strip fluorescent fixtures.
- Significant reduction in maintenance costs and easily cleaned.
- Streamlined packaging for easy job site management and easy installation in the field.

CONSTRUCTION

- Driver/ballast covers are precision formed 22 gauge steel, 4.25" or 5.00" wide, painted white. 8 ft. kit includes a one piece 8 ft. long driver/ballast cover.
- Lampholders mount directly to driver/ballast covers.
- Kit includes: driver/ballast cover, optional lampholders, tek screws, and quarter turn fasteners.

ELECTRICAL

- Choice of shunted or unshunted lampholders. If pre-wired assembly kit is ordered separately, lamp holders will be included in the wiring.
- Lampholders are high profile snap-in rotating camlock design.
- LED tubes not included (sold separately).

APPLICATIONS

Relamping 4' or 8' fluorescent strip fixtures to one, two or four T8 LED tubes, most common in industrial or commercial spaces.

WARRANTY

- Backed by Accendo's 5-year limited warranty.


Ordering Information

Ordering Example: ALRCK-4-02-SH-425-XLS


	Size	No. LAMPS	Lamp Holders	CHANNEL WIDTH	Series
ALRCK	4 4 ft.	01 1 T8 Lamp	SH Shunted Lamp Holders	425 4.25"	XLS
	8 8 ft.	02 2 T8 Lamps	US Unshunted Lamp Holders	500 5.00"	
		03 3 T8 Lamps	NO Lamp Holders included with Pre-Wired Assembly (sold separately)		

Additional:


DIMENSIONS

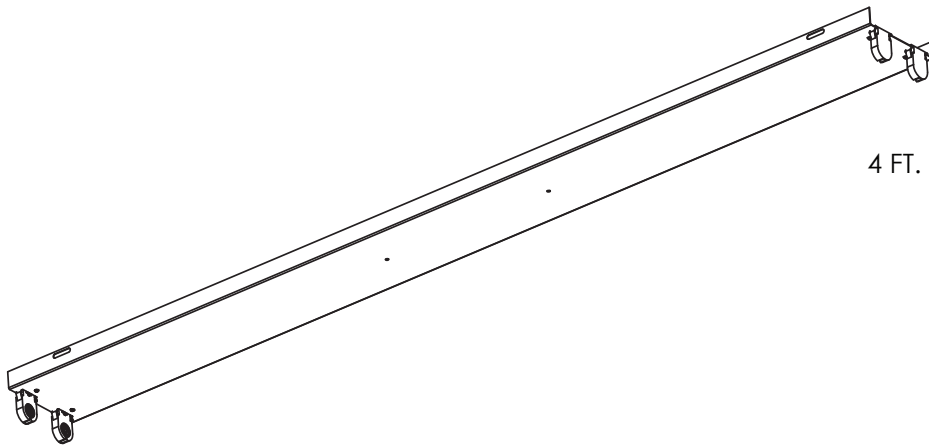

4 FT. LENGTH SHOWN

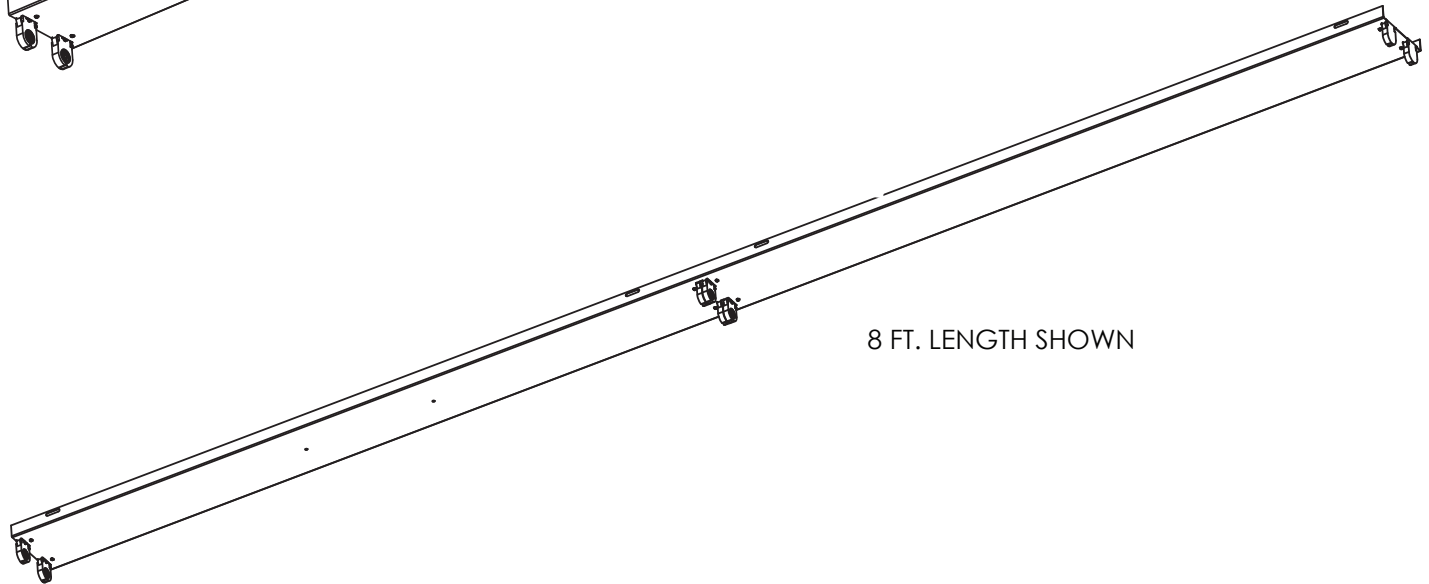

8 FT. LENGTH SHOWN

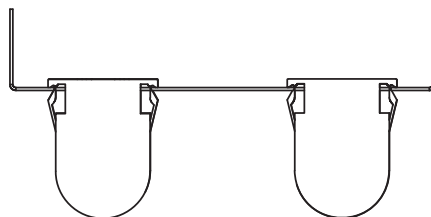

END VIEW