




ACCENDO
LIGHTING

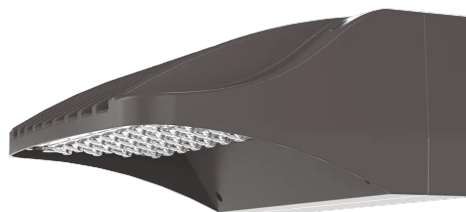

General Description:

Gracefully and stylishly constructed to be superior in its class, the Accendo Lighting Viento product family showcases a new and unique take on the common wall pack. The new Viento Wall Pack is ideal for architects and specifiers looking for an LED luminaire that blends seamlessly with a variety of architectural styles and pairs perfectly with our Viento Area & Site Luminaire.

The sleek and contemporary Viento Wall Pack (ALVNTW) is ideal for illuminating building facades, entryways, sidewalks, and general areas for security or accent lighting. Its uniform light distribution is perfect for increased visibility in almost every outdoor application imaginable. Available in White or Bronze

The exceptional performance and the available options truly set it apart in the market. The Viento Wall Pack impressively delivers up to 135 LPW and is available in up to 11,000 nominal lumens. Powered by best-in-class LEDs and incorporating advanced thermal management technology, it operates in the following temperatures: -40°C to +50°C (-40°F to +122°F)



FEATURES

- Lumen packages ranging from 3000L to 15000L.
- Uniform light distribution, ideal for building facades, entry ways, sidewalks and general security or accent lighting.
- LED provides a significant energy savings over HID.
- Designed for ease of installation.

CONSTRUCTION

- Two-piece die-cast aluminum with integral heat sink fins.
- Powder coat finish with custom colors are available (consult factory)
- Silicone gasket is included to prevent leakage and provide weather-tight protection.
- IP66, precision molded, polycarbonate optics providing impact resistance and UV stabilization.

ELECTRICAL

- Voltage: 120-277V or 347-480V AC input
- Driver: Class 2, constant current, calibrated to lumen packages (0-10V dimming standard)
- Operating temperature: -40°C to +50°C (-40°F to +122°F) ^{1,2}

CONTROLS

- Smart sensor and button photocell control options available.

MOUNTING

- Designed to be surface mounted on a wall.

WARRANTY

- Backed by Accendo's limited 5-year warranty.

Ordering Information

Ordering Example: ALVNTW-10000L-40K-DIM-3M-BZ-EM-XLS

	MODEL	CCT	Driver	Lens/Optics	Finish	Options	Series
ALVNTW	3000L	30K 3000K	DIM Dim 0-10 V, 120-277 V	2M Type II Medium	WH White	EM ³ Emergency Battery Back-up	XLS
	3500L	40K 4000K		3M Type III Medium	BZ Bronze	CEM ³ Cold Weather Emergency Battery Back-up	
	5000L	50K 5000K	48D Dim 0-10 V, 347-480 V	4M Type I V Medium	CC Custom Color	GTG Generator Transfer Device	
	5500L					S2 Smart Sensor, 8'H/48'D	
	8000L					S3 Smart Sensor, 20'H/40'D	
	10000L					PC Photocell, Button, 120-277V	
	15000L						

1. EM operating temperature: 3000L-3500L 0°C to +40°C (32°F to +104°F), 5000L-5500L 0°C to +35°C (32°F to +95°F), 8000L 0°C to +30°C (32°F to +86°F)

2. CEM operating temperature: 3000L-3500L -20°C to +40°C (-4°F to +104°F), 5000L-5500L -20°C to +35°C (-4°F to +95°F), 8000L -20°C to +30°C (-4°F to +86°F)

3. EM & CEM options not available with 10000L-15000L models.

Additional:

PHOTOMETRIC DATA

STANDARD

SIZE	MODEL	WATTAGE	OPTICS	B-U-G	3000K		4000K		5000K	
					LUMENS	EFFICACY	LUMENS	EFFICACY	LUMENS	EFFICACY
VNTW	3000L	19	4M	1-0-1	3027	156	3153	163	3154	163
			3M	1-0-1	3055	157	3182	164	3183	164
			2M	1-0-1	3196	166	3329	172	3330	173
	3500L	22	4M	1-0-1	3443	156	3586	163	3587	163
			3M	1-0-1	3474	158	3619	164	3620	165
			2M	1-0-1	3652	166	3784	172	3785	172
	5000L	32	4M	1-0-2	4952	155	5158	161	5159	161
			3M	2-0-1	5024	157	5233	164	5234	164
			2M	2-0-2	5228	163	5446	170	5447	170
	5500L	35	4M	2-0-2	5332	155	5554	161	5555	161
			3M	2-0-1	5409	157	5635	163	5636	163
			2M	2-0-2	5629	163	5864	170	5865	170
	8000L	55	4M	2-0-2	7983	145	8316	151	8318	151
			3M	2-0-2	8057	146	8392	153	8394	153
			2M	2-0-2	8429	153	8780	160	8782	160
	10000L	74	4M	3-0-3	10761	145	11209	151	11211	151
			3M	2-0-2	10860	146	11312	152	11314	152
			2M	2-0-2	11361	153	11835	159	11837	159
	15000L	106	4M	3-0-3	14371	136	14970	141	14973	141
			3M	3-0-3	14503	137	15108	143	15111	143
			2M	3-0-3	15173	143	15806	149	15809	149



DIMENSIONAL DATA

STANDARD SIZES

WEIGHT:

3000-5500L = 17.5 LB

8000L-15000L = 18 LB

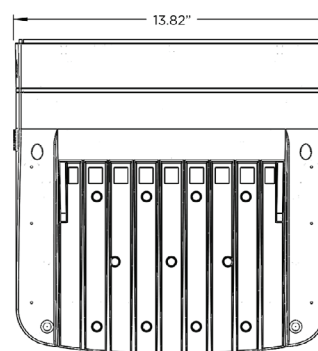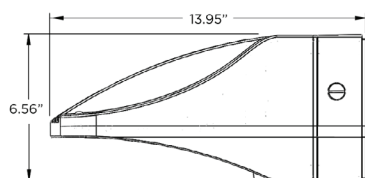

- Dimensional Data shows top and side views for all standard sizes.
- All weights are rounded up to the nearest 0.5 lb.